

Instructions for integrating
AC•THOR[®] or AC ELWA[®]-E
into SMA Sunny Home Manager (SHM)



Contents

1. Default settings on AC•THOR or AC ELWA-E	2
AC•THOR Control setting for SMA.....	2
AC ELWA-E Control setting for SMA	2
2. Integrating device in the Sunny Home Manager (SHM).....	3
Searching for and adding AC•THOR or AC ELWA-E in the SHM.....	3
Configuration - Step 1	4
Configuration - Step 2	5
Configuration - Step 3	5
3. AC•THOR or AC ELWA-E with SHM and Sunny Island (SI) battery inverter	8
4. Control multiple devices with the SHM	8
5. Settings for systems with zero feed-in	9

1. Default settings on AC•THOR or AC ELWA-E

Before commissioning, it is essential that you read the assembly instructions that accompany the device, as well as the operating instructions available on line.

Please refer to the AC•THOR operation manual at www.my-pv.com

Please refer to the AC ELWA-E operation manual at www.my-pv.com

AC•THOR Control setting for SMA

With the AC•THOR, "SMA Home Manager" must be selected either on the display **or** in the web interface for the control type. Further settings are **not** required for communication with SMA.



OR

Control type

Signal source: ACTHOR Number >1: only "Slave" selectable	SMA Home Manager
	<input type="button" value="Save"/>

AC ELWA-E Control setting for SMA

With the AC ELWA-E, "SMA Home Manager" must be selected for the control type in the web interface. Further settings are **not** required for communication with SMA.

Control Type / Ansteuerungs-Typ

Signal source: / Ansteuerungs-Typ: ELWA Number >1: only "Slave" selectable ELWA Nummer >1: nur "Slave" einstellbar	SMA Home Manager
	<input type="button" value="Save / Speichern"/>




TIP: This setting can only be made if the AC ELWA-E has the factory preset device number "1". Even if several devices are controlled by SMA, it is not necessary to change the device numbers! See heading "Basic settings" also on the "Setup" page.


Basic Settings / Grundeinstellungen

Number / Nummer:	1
Fusetype: / Absicherung:	16 A
	<input type="button" value="Save / Speichern"/>

2. Integrating device in the Sunny Home Manager (SHM)

 The SHM must already be registered in the SMA portal!

If – Configuration – Device overview is selected in the SMA portal, only the SHM will be displayed at first. AC•THOR or AC ELWA-E will not appear to start with. Once the configuration process is complete, it will appear in the lower-level menu item – Load overview and planning.

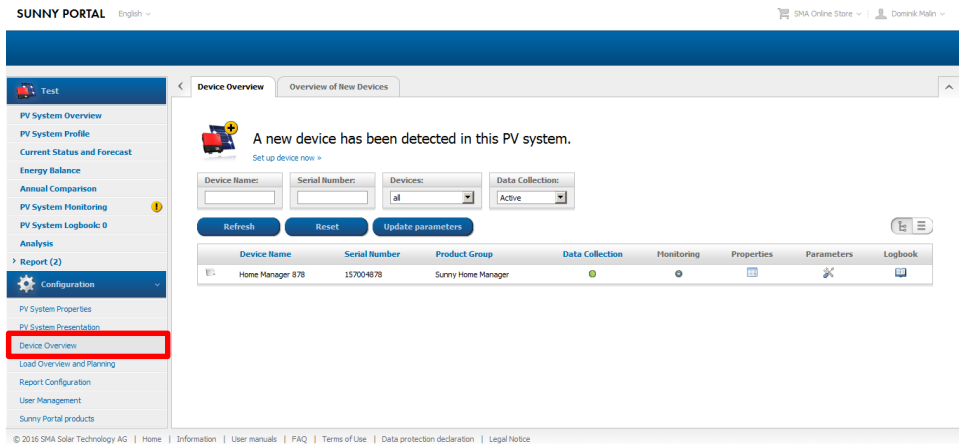


The screenshot shows the 'SUNNY PORTAL' interface. The left sidebar has 'Device Overview' highlighted in red. The main content area is titled 'Device Overview' and 'Overview of New Devices'. A message states: 'A new device has been detected in this PV system. Set up device now >'. Below this are input fields for 'Device Name', 'Serial Number', 'Devices' (dropdown), and 'Data Collection' (dropdown). There are 'Refresh', 'Reset', and 'Update parameters' buttons. A table below lists the detected device:

Device Name	Serial Number	Product Group	Data Collection	Monitoring	Properties	Parameters	Logbook
Home Manager 878	157004878	Sunny Home Manager					

Searching for and adding AC•THOR or AC ELWA-E in the SHM

Update the list under – Configuration – Device overview – Overview of New Devices – “Refresh devices”.

This process may take several minutes.

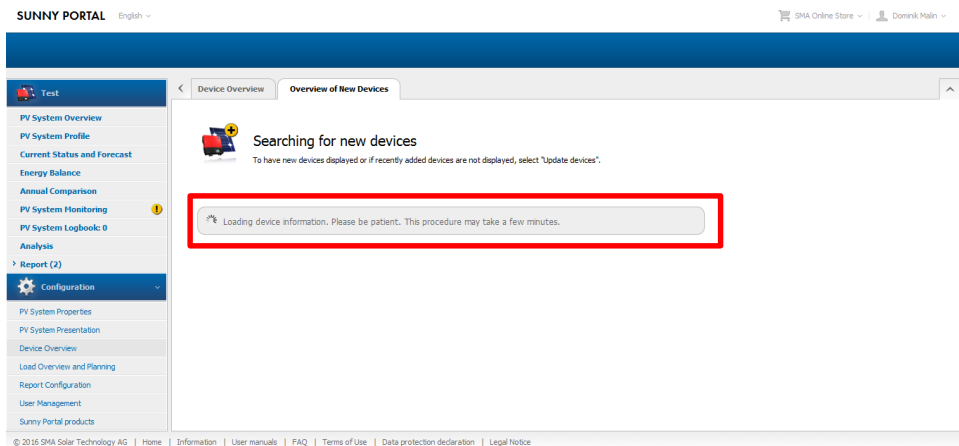

The screenshot shows the 'SUNNY PORTAL' interface. The left sidebar has 'Device Overview' highlighted in red. The main content area is titled 'Device Overview' and 'Overview of New Devices'. A message states: 'Searching for new devices. To have new devices displayed or if recently added devices are not displayed, select "Update devices".' Below this is a loading spinner and the text: 'Loading device information. Please be patient. This procedure may take a few minutes.' This loading area is highlighted with a red box.

AC•THOR or AC ELWA-E will appear as a "Smart Appliance" together with its MAC-address - click "+" to configure.

SUNNY PORTAL English ▾ SMA Online Store ▾ Dominik Main ▾

Test

Device Overview Overview of New Devices

A new device has been detected in this PV system.

With which configuration would you like to add the new device to this Sunny Portal PV system?

As a PV System Extension (Additional Device) (configuration assistant opens)

- Edit the device name
- Adjust generator power

As a Replacement Device (configuration assistant opens)

- Before starting the configuration wizard, you must deactivate the data acceptance of the device to be replaced.
- Select the device to be replaced
- Transfer data to the replacement device

Important Information: Incorrect allocation of new devices may lead to faulty display.

Device	Product Group	Serial Number	Configuration
	Smart Appliance	986035C00001	

[Refresh devices](#)

© 2016 SMA Solar Technology AG | Home | Information | User manuals | FAQ | Terms of Use | Data protection declaration | Legal Notice

Configuration - Step 1

Product type will be used automatically in combination with the last three characters of the MAC address as a device name. The MAC address can also be seen on the type plate.

SUNNY PORTAL English ▾ SMA Online Store ▾ Dominik Main ▾

1 2 3
Device Name Device Characteristics Summary

Smart Appliance - PV System Extension

Enter the desired name of the device. You can also select and edit one of the suggestions.

Device Name*:

Insert Suggestion:

Use product name → AC ELWA-E
Use serial number → 986035C00001
Product name + serial number Last 3 digits → AC ELWA-E 001

* Required field

[Back](#) [Cancel](#) [Next](#)

© 2016 SMA Solar Technology AG | Home | Information | User manuals | FAQ | Terms of Use | Data protection declaration | Legal Notice

Configuration - Step 2

In order for AC•THOR or AC ELWA-E to simply make use of surplus energy that can no longer be used by other loads, my-PV recommends the following settings:

- Set the priority of the load to a very low
- Switch on the load depending on the proportion of PV energy
- Move the "Optimum energy demand" slide to 100% PV

SUNNY PORTAL English ▾ SMA Online Store ▾ Domnik-Main ▾

1 2 3

Device Name Device Characteristics Summary

Smart Appliance - PV System Extension

ON
SMART
Serial Number: 986035C00001

Priority of the load: very low

Optional energy demand: Load will be switched on depending on:
 Proportion of the PV energy
 Maximum permitted energy costs

External energy supply: 0 %
PV power generation: 100 %

Back Cancel Next

© 2016 SMA Solar Technology AG | Home | Information | User manuals | FAQ | Terms of Use | Data protection declaration | Legal Notice

Configuration - Step 3

These settings are displayed once more for checking.

SUNNY PORTAL English ▾ SMA Online Store ▾ Domnik-Main ▾

1 2 3

Device Name Device Characteristics Summary

Smart Appliance - PV System Extension

ON
SMART
Serial Number: 986035C00001


If the data is correct, select "Finish".

Device Name: AC ELWA-E 001
Priority of the load: very low
Load will be switched on depending on: Proportion of the PV energy
External energy supply: 0 %
PV power generation: 100 %


Back Cancel Finish

© 2016 SMA Solar Technology AG | Home | Information | User manuals | FAQ | Terms of Use | Data protection declaration | Legal Notice

Click the "Finish" button to complete the addition of the new system extension. This is confirmed with a message.

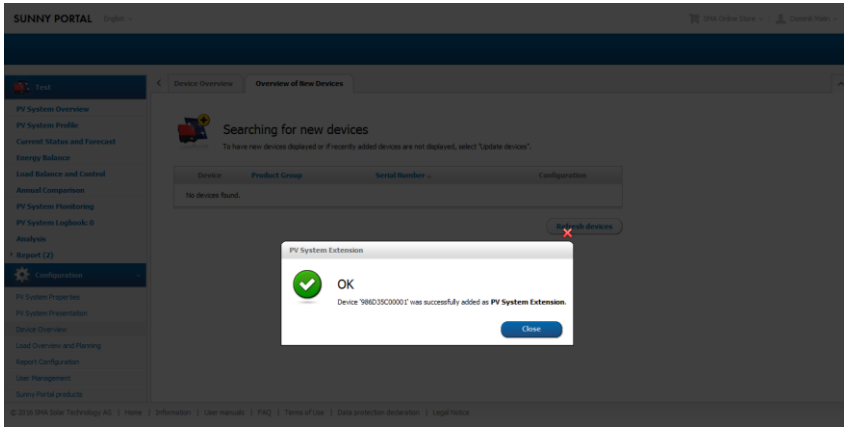

Once the configuration is complete, AC•THOR or AC ELWA-E will appear in the menu item – Load overview and planning.

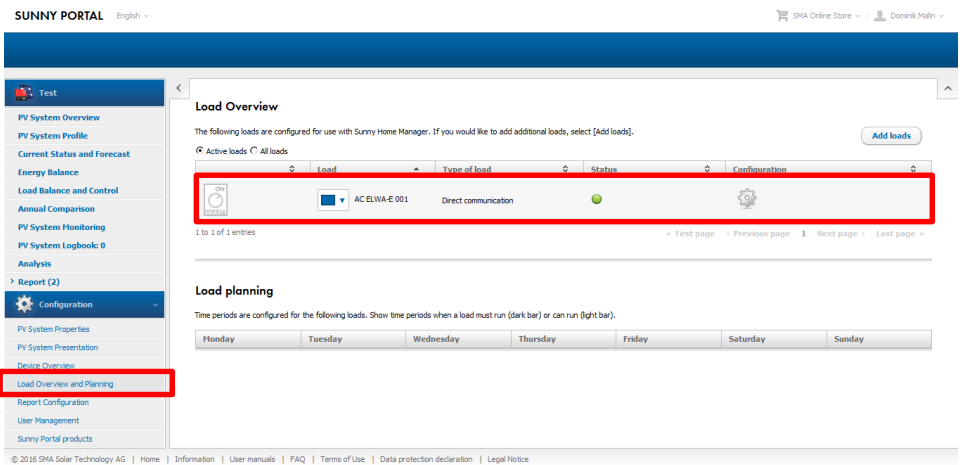

The load characteristics of the new "Smart Appliance" can be displayed again at any time.


Test < Load Overview and Planning AC ELWA-E 001


Load characteristics

Data Collection:	<input checked="" type="checkbox"/> Active
Name of Load:	AC ELWA-E 001
Product Group:	AC ELWA-E
Serial Number:	986035C0001
Power Consumption:	3000 W
Priority of the load:	low <input type="range"/> high
Optional energy demand:	Load will be switched on depending on: <input checked="" type="radio"/> Proportion of the PV energy <input type="radio"/> Maximum permitted energy costs External energy supply: 0 % PV power generation: 100 %
Load icon:	
Load color:	<input type="color" value="#0000FF"/>

Save Cancel Delete Upload load icon

© 2016 SMA Solar Technology AG | Home | Information | User manuals | FAQ | Terms of Use | Data protection declaration | Legal Notice

 In the SHM AC•THOR or AC ELWA-E are not managed via time windows as is usually the case with wireless sockets for example!

 Periods in which hot water securing must be boosted are specified in AC•THOR or AC ELWA-E settings directly. (see respective operating instructions on www.my-pv.com)




 Bear in mind the optimization target settings within the SHM!

The factory setting of the SHM for the payment settings has an optimisation target of "economical". In this case, my-PV recommends changing the optimisation target to "ecological"! Readjust this under – Configuration – PV system properties – Parameters.

Optimization Target

The optimization target indicates whether the Sunny Home Manager should prioritize ecological or economical factors for load management. If you select "ecological" as the optimization target, the Sunny Home Manager calculates the solution which uses the greatest self-consumption. Greater self-consumption conserves the environment because there is no energy loss caused by the transport of current through the power distribution grid. If you select the "economical" optimization target, the Sunny Home Manager calculates the most financially rewarding control of the loads, taking into consideration the feed-in and self-consumption tariffs. In certain cases, it may be more economical to feed the PV electricity into the power distribution grid and to operate the individual loads at night using electricity purchased from the grid.

Optimization Target

 ecological
 
 economical


3. AC•THOR or AC ELWA-E with SHM and Sunny Island (SI) battery inverter

my-PV recommends prioritising the use of excess energy for charging the battery. Only once the battery has finished charging AC•THOR or AC ELWA-E should start generating heat. This is achieved by making the following setting:

- Deactivate forecast-dependent charging of battery

Configuration – Device overview – Sunny Home Manager properties – click on Edit – “Deactivate”

Image soon in English!

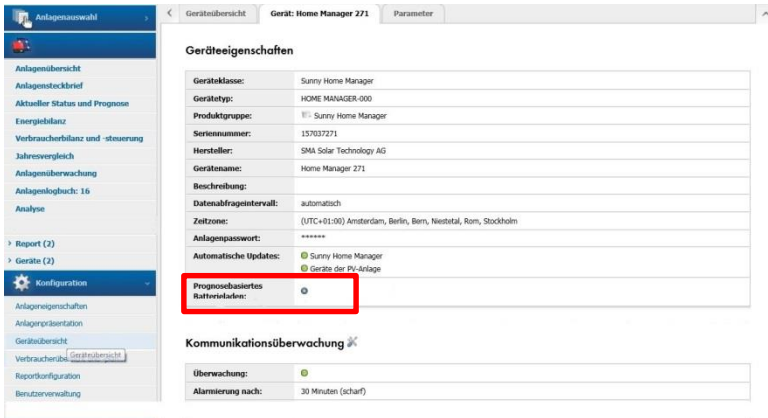

Once the battery is fully charged, AC•THOR or AC ELWA-E are only then used when no other consumer has a higher priority!

⚠ If the excess PV power is greater than the maximum charging capacity of the battery, generation of heat can simultaneously happen with battery charge!


4. Control multiple devices with the SHM

⚠ The adaptation of the internal multi-settings for the operation of several devices is **not required** when controlled by the SMA SHM!

Since the SHM actively controls loads like AC•THOR or AC ELWA-E, it is not necessary to configure one device as master and the others as slaves. All devices continue to have the factory pre-set device number 1.

5. Settings for systems with zero feed-in

For systems with zero export to the power-grid the settings have to be made as follows.

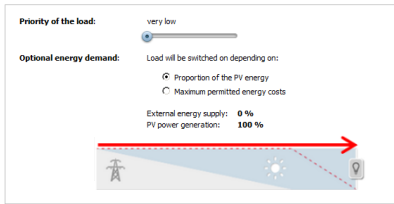

my-PV GmbH
Teichstrasse 43, 4523 Neuzeug
www.my-pv.com

Subject to change.

MYPV